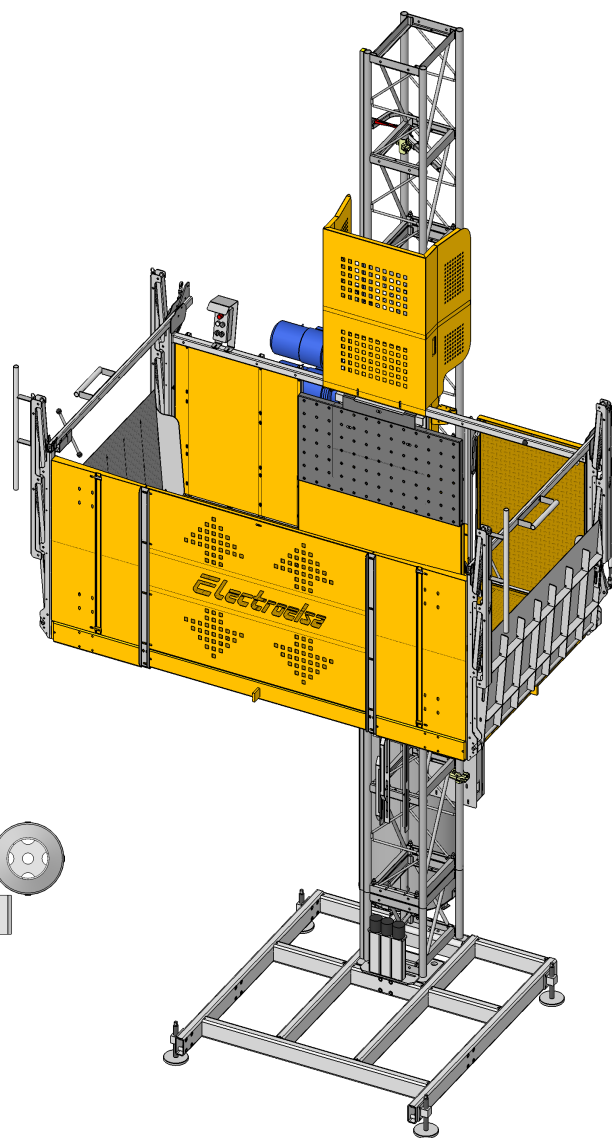
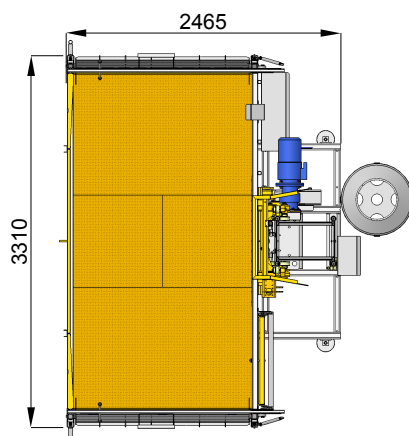
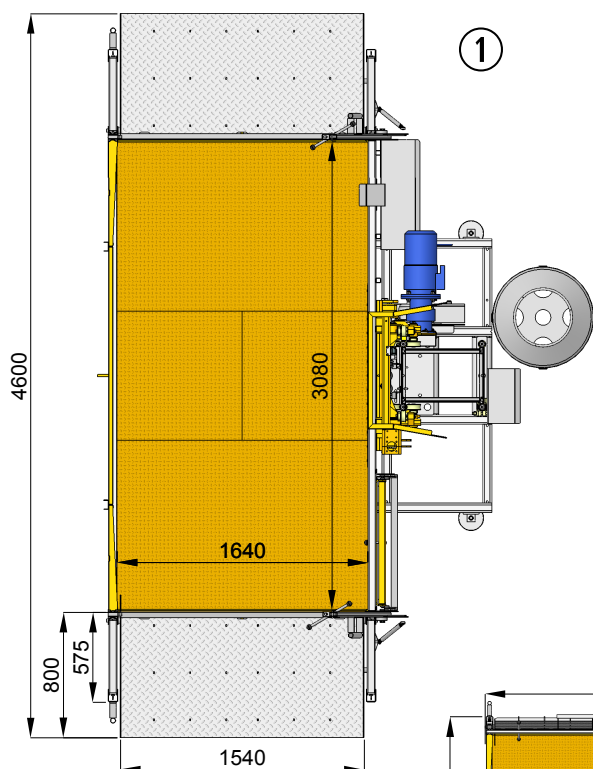





CAPACITÀ DI CARICO  
PAYLOAD

|   |          |             |
|---|----------|-------------|
|   | 1500 kg  | <b>EHM</b>  |
| 1 | +1400 kg | <b>EHPM</b> |
| 2 | +1300 kg |             |
| 3 | +1200 kg |             |
| 4 | +1100 kg |             |
| 5 | +1000 kg |             |
| 6 | +900 kg  |             |
| 7 | +800 kg  |             |
| 8 | +700 kg  |             |


PIATTAFORMA DI TRASPORTO / MONTACARICHI  
TRANSPORT PLATFORM / MATERIAL HOIST

| Dati tecnici                        | Technical Data                | Données Techniques                  | Datos Técnicos                      | EHPM 2500/10                     | EHM 2500/10                      |
|-------------------------------------|-------------------------------|-------------------------------------|-------------------------------------|----------------------------------|----------------------------------|
| Capacità con limitatore di carico   | Capacity with overload system | Charge avec limiteur de charge      | Capacidad con limitador de carga    | 1500 kg                          | 1500 kg                          |
| Velocità di sollevamento            | Lifting speed                 | Vitesse de levage                   | Velocidad de elevación              | 12 m/min                         | 20 m/min                         |
| Massima altezza ancorata            | Max anchored height           | Hauter max avec ancrages            | Altura max con anclajes             | 220 m                            | 220 m                            |
| Dimensioni interne cesta            | Platform dimensions           | Dimensions du plancher              | Dimensiones de cabina               | ①3,08 x 1,64 m<br>②3,43 x 1,64 m | ①3,08 x 1,64 m<br>②3,43 x 1,64 m |
| Tensione alimentazione              | Input power range             | Tension d'alimentation              | Tensión de red                      | 380/415 V<br>50/60 Hz            | 380/415 V<br>50/60 Hz            |
| Interruttore protezione linea       | Protection switch             | Interrupteur de protection          | Interruptor de protección           | 25 A                             | 32 A                             |
| Potenza servizio continuo           | Power of the motors           | Puissance des moteurs               | Potencia de motorreductores         | 2 x 4 kW                         | 2 x 5,5 kW                       |
| Minima potenza di linea consigliata | Minimum line power suggested  | Min. puissance de ligne conseillée  | Min. Potencia de linea              | 12 kW                            | 15 kW                            |
| Peso unità base                     | Base unit weight              | Poids unité de base                 | Peso unidad de base                 | ①1.790 Kg<br>②1.900 Kg           | ①1.790 Kg<br>②1.900 Kg           |
| Ingrassatore automatico cremagliera | Rack automatic greasing pump  | Graisser automatique de cremalliere | Engrasador automatico de cremallera | ✓                                | ✓                                |

## DIMENSIONE CESTA DI CARICO AUMENTABILE CON PROLUNGA

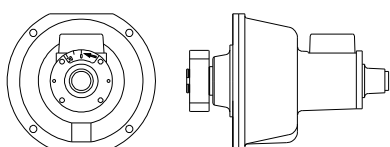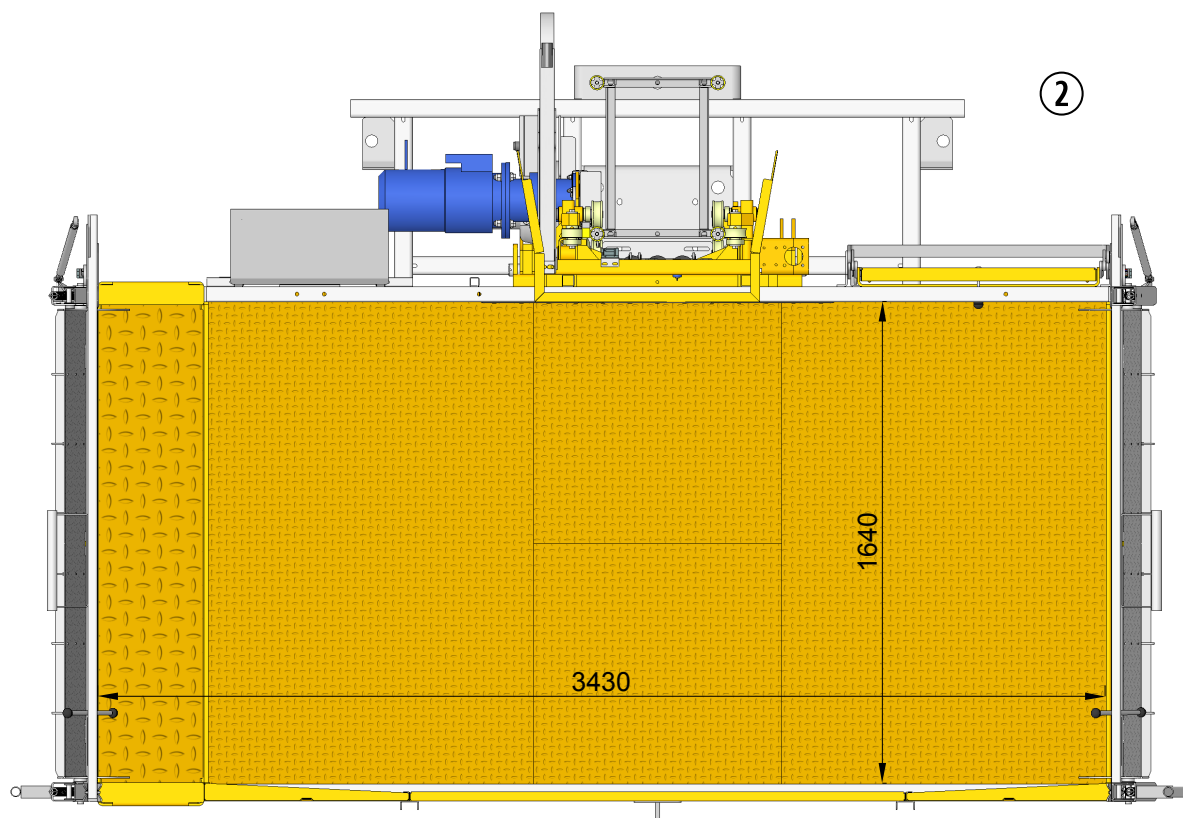


Freno d'emergenza  
ad arresto progressivo  
*Overspeed safety device  
with progressive stop*

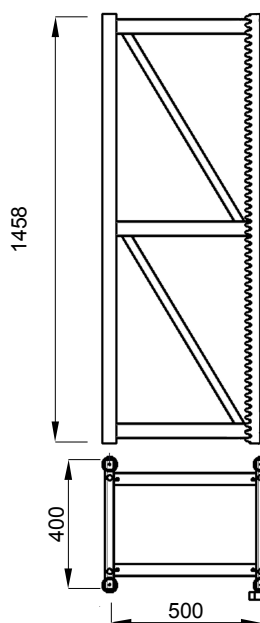

Compatibile con:  
*Interchangeability:*

EHPM/EHM 2500 15  
ELSA PM-M 50  
ELSA H20  
ELSA P40

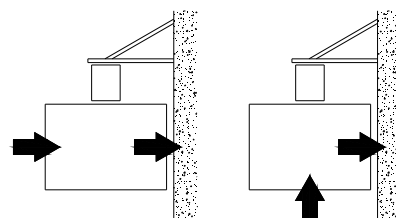

Configurazioni d'accesso possibili  
*Possible access configurations*

